


ROCKO

Technical Data Sheet



WFSPC 02/ 11-22

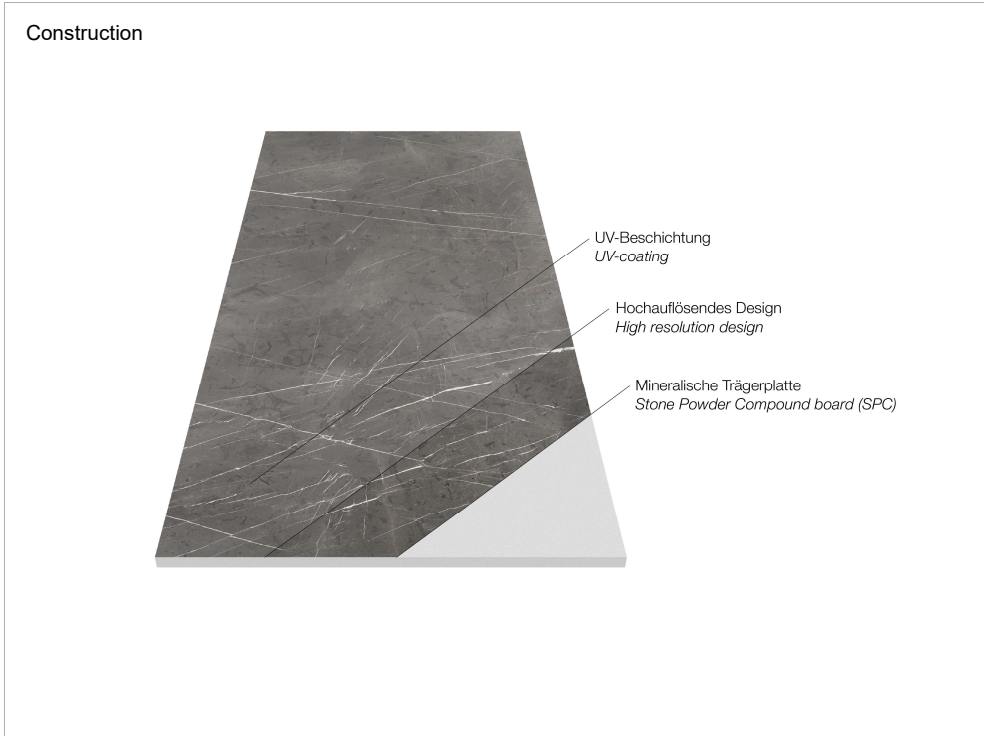

Scratch resistance - value	EN 438-2	5,5N
Scratch resistance - class	EN 438-2	4
Hamberger Test	internal	40N
Light fastness (blue wool scale 6)	EN 20105-B02	≥ 4
PU adhesion / Cross cut test [0-5]	EN ISO 2409	0
Mechanical properties		
Dimensional stability - length / width	ISO 23999	≤ 0,25 %
Reaction to fire	EN13501-1	C-s2, d0
Thermal resistance	EN 12667	0,008 W/(m²K)
Residual indentation	ISO 24343-1	0,00 mm
Humidity exposure	internal	No visual change or failure
Changing temperatures test	internal	OK
Emission		
TÜV PROFICERT LEVEL	Internal	Premium
AgBB		✓
A +		✓
Belgian VOC regulation		✓
Ml 1 Finnish classification		✓
Austrian Eco Label UZ 56		✓

Test method	Norm	Result
dimensions length x width thickness		2800mm x 1230mm 4mm (tmax - tmin ≤ 0,50 mm)
Surface		
Large ball impact test	EN 438-2	1800mm
Micro scratch resistance, procedure A	EN 16094	A2
Chemical resistance	EN 438-2	Gr. 1-2 grade 5 Gr. 3 grade 5
Abrasion resistance	EN 15468	3000 Cycles